

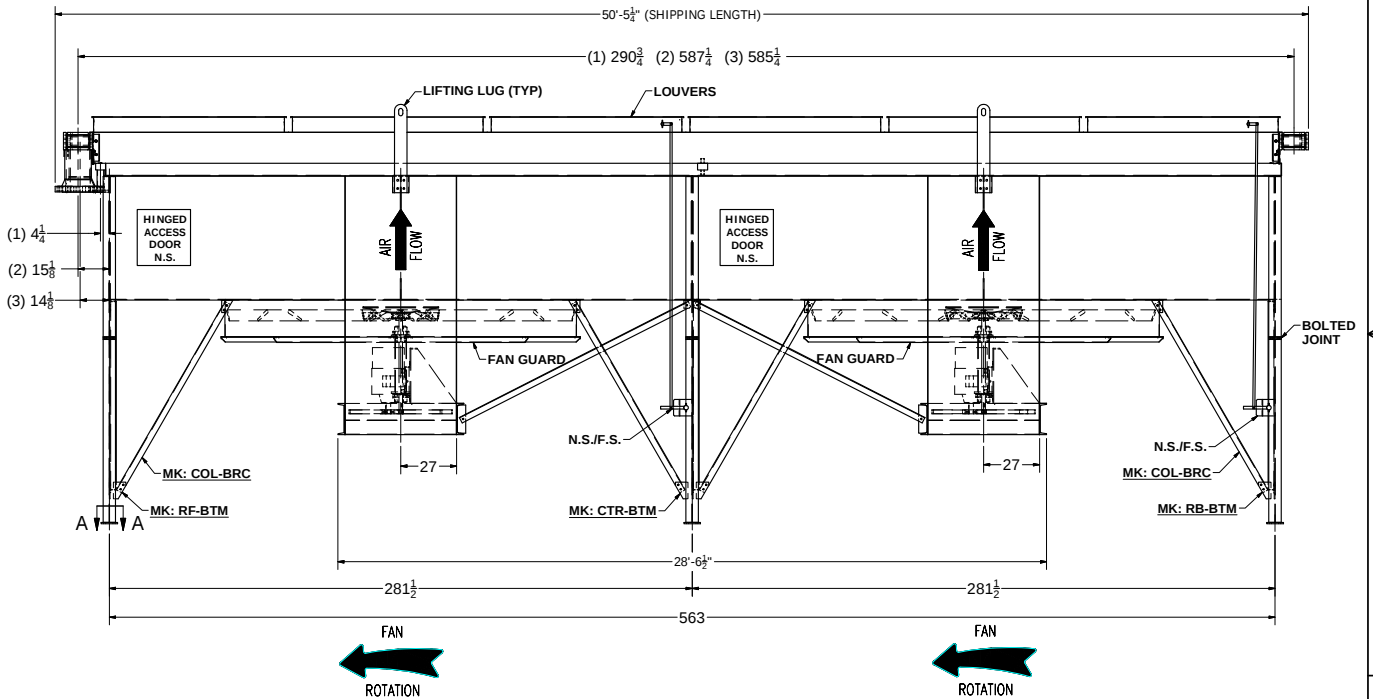


ITEM	SERVICE	MAWP	CODE	INLET	OUTLET	V/D/TEMP	DIM B	DIM C	LOUVERS	BUG SCREEN	DRIVE	FAN	FINISH
1	CLO 30.2 GALS.	150 PSI @ 250/-20° F	NONE	3"-150 RFWN	3"-150 RFWN	(2) 1-3000	-	-	-	NONE	ELECTRIC MOTOR DRIVE SHEAVES, BELTS & GUARDS BY AXH (2) 40 HP. 1800 RPM, 3P 60 Hz, 460V, TEFC, VFD, MOTORS	168" Ø (2) MOORE-10K S42 HD VE EC 8-BLADE 7.3" PA. LH ROTATION 217 RPM @ 36.4 HP REQ'D Ø2.6875" BORE WITH .625 x .3125 KWY.	STRUCTURE SIDE FRAMES GALVANIZED HEADERS STD. PRIMER W/ WARM GRAY ENAMEL TOP COAT
2	IC 38.37 CU.FT.	660 PSI @ 350/-20° F	ASME	12"-600 RFWN	12"-600 RFWN	-	-	-	(2) MANUAL				
3	AC 29.88 CU.FT.	1440 PSI @ 350/-20° F	ASME	10"-900 RFWN	10"-900 RFWN	-	-	-	(2) MANUAL				

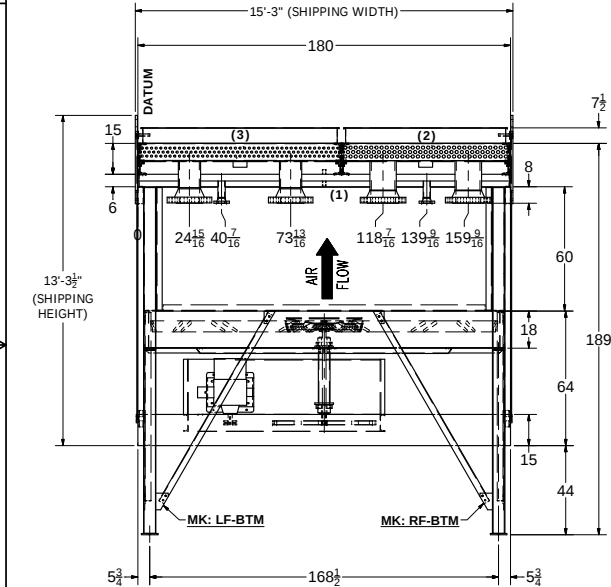

RELEASED
FABRICATION OF THIS
ORDER HAS BEGUN

SECTION A-A
SCALE 1 / 6
6-PLACES

4	DELETED GROUNDING LUGS	MIKE	JS	3/21/2012			
3	ADDED GROUNDING LUGS	MIKE	JS	2/22/2012			
2	CHANGED TO FLANGE BEARING DRIVE	DC	JS	2/1/2012			
1	ADDED 2 MANUAL OPERATORS	DC	MB	1/27/2012			
REV	DESCRIPTION	BY	CK	DATE	CK:	DATE:	
					J.S.	1/9/2012	

FOR:	Ag Equipment
P.O. #:	164614
CUST. TAG #:	11379/11380/11381
USER:	Caimen Energy
JOB SITE:	Unknown
JOB #:	110541
DR:	Drew Caldwell
DATE:	12/28/2011
DATE:	1/9/2012

ESTIMATED DRY WEIGHT	56,200 #
 AXH air-coolers	
CERTIFIED DRAWING FOR:	
MODEL	168-2ZF
QUANTITY:	3
SIZE	
DWG NO	110541-CRT
REV	4
SCALE	Full
DATE	12/29/11
SHEET 1	OF 1