

ENVIROTEMP™ F

EATON

COOPER POWER SERIES

3Φ DISTRIBUTION
TRANSFORMER ASSEMBLED
IN WAUKESHA, WI U.S.A

KVA 10000 65°C 60Hz



MANUFACTURER'S CODE 2059000550 0000CA71FONS

HV 12470 KNAN

LV 4160Y/2400 6.7 %Z @85°C MFG DATE MAR20

HV KV BIL 95
HV NEUTRAL KV BIL --
LV KV BIL 60
HV/LV CONDUCTOR AL / AL

PCB CONTENT LESS THAN 1 PPM AT TIME OF MANUFACTURE
CAUTION - READ INSTRUCTION MANUAL MN202002EN

194012A2642-00


APPROX. WEIGHT IN LBS.

CORE & COIL
UNTANKING 17570

TANK & FIT 10810

FLUID: FR3™
GALLONS: 1252 9615

TOTAL 37995

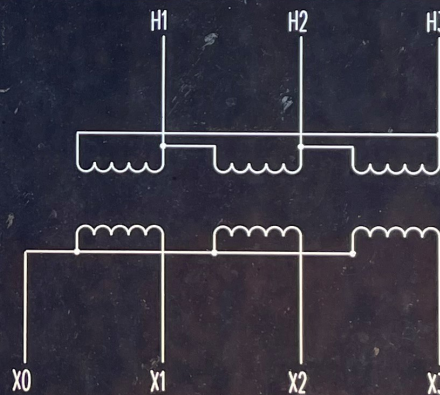

TAP	VOLTAGE	MAX AMPS	LOW VOLTAGE	MAX AMPS
A	13090	441	4160	1389
B	12780	452		
C	12470	463		
D	12160	475		
E	11850	487		



MAX AMPS AT 10000 KVA
%Z AT BASE KVA AND RATED VOLTAGE

PHYSICAL BUSHING ARRANGEMENT

E234598
UL US LISTED
17YP

LIQUID-FILLED DISTRIBUTION TRANSFORMER
LIQUID-IMMERSED DISTRIBUTION TRANSFORMER

25 DEG.C LIQUID LEVEL 11 INCHES BELOW TOP OF MANHOLE FLANGE. LIQUID LEVEL CHANGES 0.69 INCHES PER 10 DEG.C CHANGE IN LIQUID TEMPERATURE. MAXIMUM OPERATING PRESSURES OF LIQUID PRESERVATION SYSTEM 6 PSI POSITIVE AND 2 PSI NEGATIVE. TANK DESIGNED FOR 15PSI VACUUM FILLING